

## Logic elements

### Type AND42, OR42, YES, NOT-S, MV32



AND42, OR42



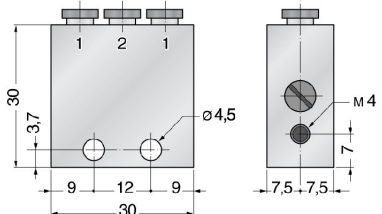

MV32



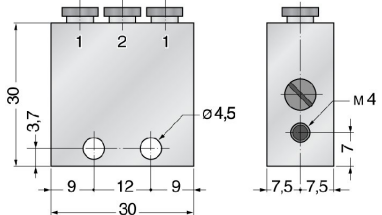

YES, NOT-S

|                |                                                                                                 |
|----------------|-------------------------------------------------------------------------------------------------|
| Connection     | 4 mm push-in<br>MV32: G1/8" ... G1/4"                                                           |
| Pressure range | 2...10bar                                                                                       |
| Flow rate      | 95 NI/min<br>MV32: 500 NI/min or rather 1100 NI/min                                             |
| Medium         | filtered and lubricated or non-lubricated compressed air                                        |
| Note           | CAD files are available in the STASTO Store at <a href="http://www.stasto.eu">www.stasto.eu</a> |

#### AND42 AND element

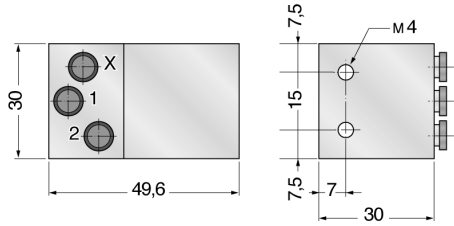

|                                                                                     |                                                                                     | Function | Type  |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|-------|
|  |  | AND      | AND42 |

#### OR42 OR element

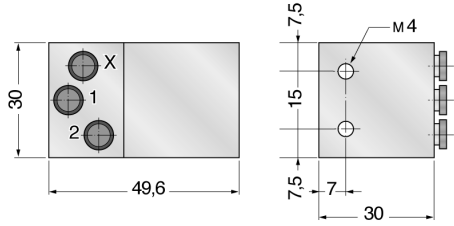

|                                                                                     |                                                                                     | Function | Type |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|------|
|  |  | OR       | OR42 |



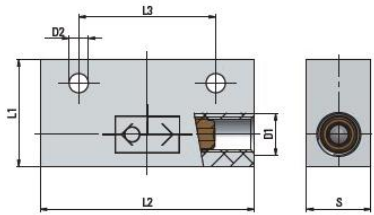

YES YES element

|                                                                                   |                                                                                   | Function | Type |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------|------|
|  |  | YES      | YES  |

NOT-S Emergency element

|                                                                                   |                                                                                   | Function | Type  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------|-------|
|  |  | NOT      | NOT-S |

MV32 OR element

|                                                                                    |                                                                                    | Function |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|----------|
|  |  | OR       |

| Connection<br>D1 | D2  | L1 | L2 | L3 | S  | Flow rate<br>[Nl/min] | Type       |
|------------------|-----|----|----|----|----|-----------------------|------------|
| G1/8"            | 4,5 | 25 | 50 | 32 | 15 | 500                   | MV32-00-18 |
| G1/4"            | 5,5 | 30 | 52 | 35 | 25 | 1100                  | MV32-00-14 |

Illustrations non-binding  
Design, dimensional and material changes reserved

Pneumatics / Way-valves - mechanically / manually, logic units / Pneumatic logic units / Double check valve Series MV32