
Partnership. With Guarantee.


Soft-start valve 1/2"
Type AVP-12-APC






Design type	Soft-start valve, adjustable
Connection	G1/2" according to ISO228/1
Materials	Housing Acetal resin (POM), Threaded connections Brass CuZn40Pb2
Function	the pressure on the secondary side is built up slowly until reaching approx. 60% of the inlet pressure and then switches through. The response time for the pressure build-up is adjustable.
Mounting type	Installation in piping system or Wall mounting
Mounting position	any
Medium	filtered and lubricated or unlubricated compressed air
Medium temperature	+5°C up to +50°C
Ambient temperature	+5°C up to +50°C
Inlet pressure	3 bar up to 10 bar
Flow direction	is marked by an arrow

Dimensions

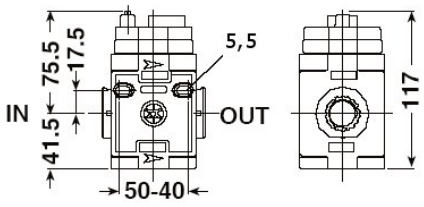




Weight 0,41 kg

+43 512 52076
austria@stasto.eu
© STASTO Automation KG

Flow diagram

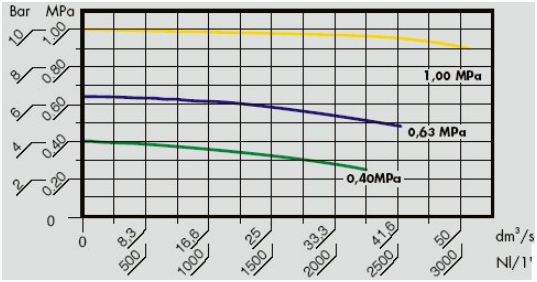

Inlet pressure = 10bar, Flow rate at standard conditions

Illustrations non-binding
Design, dimensional and material changes reserved

+43 512 52076
austria@stasto.eu
© STASTO Automation KG