













3-Putni prirubnički kuglasti ventili od čelika Serija BA310, BA311




Konstrukcija	Trosmerni kuglasti ventil sa plutajuća kugla, Kompenzacioni otvor, puni prolaz, troslojno zaptivno, nije bez preklapanja
Aktiviranje	okretanjem ručne poluge za 90°
Priključak	Prirubnice DN15...DN100 prema EN1092-1 PN16
Materijali	Kućište čelik, Kugla od nerđajućeg čelika 1.4401, Kuglična zaptivka PTFE ojačana grafitom, Zaptivka vretena PTFE, O-prstenovi FKM, Ručna poluga čelik plastificiran
Područje primene	Tečnosti i gasovi grupe 1 i 2 u skladu sa PED 2014/68/EU, koji ne napadaju korišćene materijale. Za primene sa parom preporučujemo upotrebu specijalnih parnih slavina.
Temperatura medijuma	-10...+160°C
Radni pritisak	Vakuum maks. 10^{-3} Torr do Nazivni pritisak prema tabeli i dijagramu pritisak-temperatura
Način pričvršćivanja	Ugradnja u kruti cevovodni sistem
Položaj ugradnje	proizvoljno
Odobrenja	TA-vazduh; ATEX II 2G/D c T3
Specijalne izvedbe	više temperature medija na zahtev

Šema preklapanja

BA311				BA310		
Način preklapanja 01	Način preklapanja 02	Način preklapanja 03	Način preklapanja 04	Način preklapanja 05	Način preklapanja 06	Način preklapanja 07
Pozicija 1						
						
Pozicija 2						
						
Ručice se mogu pojedinačno premestiti za 90°. Nakon uklanjanja centralnih pričvršnih vijaka na gornjoj strani vretena postaje vidljivo udubljenje koje označava položaj kugle i iz kojeg se takođe može prepoznati tip slavine.						




Abmessungen

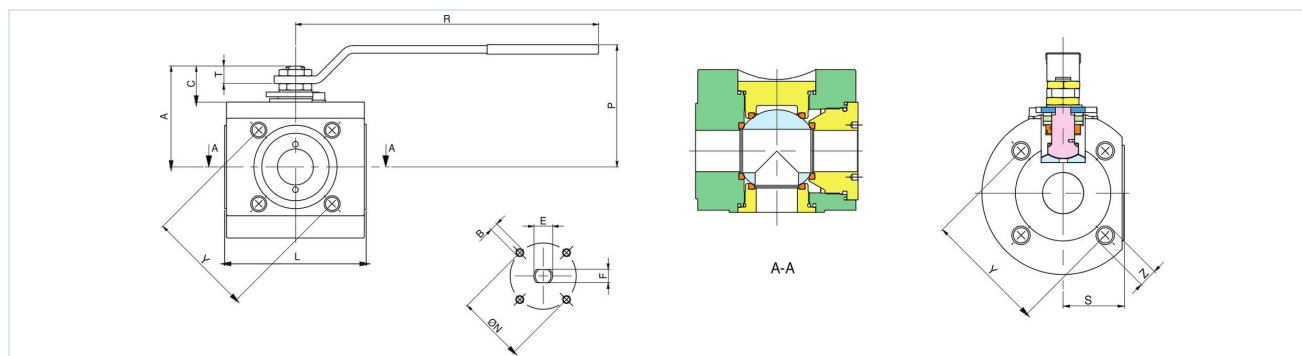

Nazivni prečnik DN[mm]	A	B	C	E	F	L	N	P	R	S	T	Y	Z
15	55	4 x M5	20	M10	7	99	42	73	131,5	35	10	65	4 x M12
20	72	4 x M6	28	M12	8	108	50	90	174	40	13	75	4 x M12
25	76	4 x M6	27	M12	8	115	50	95	174	41,5	12	85	4 x M12
32	92	4 x M6	31	M16	10	140	50	116	250	52,5	13	100	4 x M16
40	107	4 x M8	38	M20	14	150	70	129	321	56,5	18,5	110	4 x M16
50	115	4 x M8	38	M20	14	167	70	137	321	62	18,5	125	4 x M16
65	131	4 x M8	41	M20	14	185	70	150	321	85	22,5	145	4 x M16
80	147	4 x M10	40	M24	18	216	102	171	381	127	18	160	8 x M16
100	169	4 x M10	39	M24	18	244	102	192	381	150	18	180	8 x M16

Nazivni prečnik DN[mm]	PN [bar]	Kv vrednost [m ³ /h]	Težina [pribl. kg]	Tip T-provrtina	Tip L-provrtina
15	16	7,6	3,7	BA311-15-L-A	BA310-15-L-A
20	16	12,2	5,5	BA311-20-L-A	BA310-20-L-A
25	16	21,1	7	BA311-25-L-A	BA310-25-L-A
32	16	34,6	12,5	BA311-32-L-A	BA310-32-L-A
40	16	48,8	16,5	BA311-40-L-A	BA310-40-L-A
50	16	85,1	22,5	BA311-50-L-A	BA310-50-L-A
65	16	138,4	37	BA311-65-L-A	BA310-65-L-A
80	16	220,1	60	BA311-80-L-A	BA310-80-L-A
100	16	381,1	95	BA311-100-L-A	BA310-100-L-A

Dijagram pritisak-temperatura

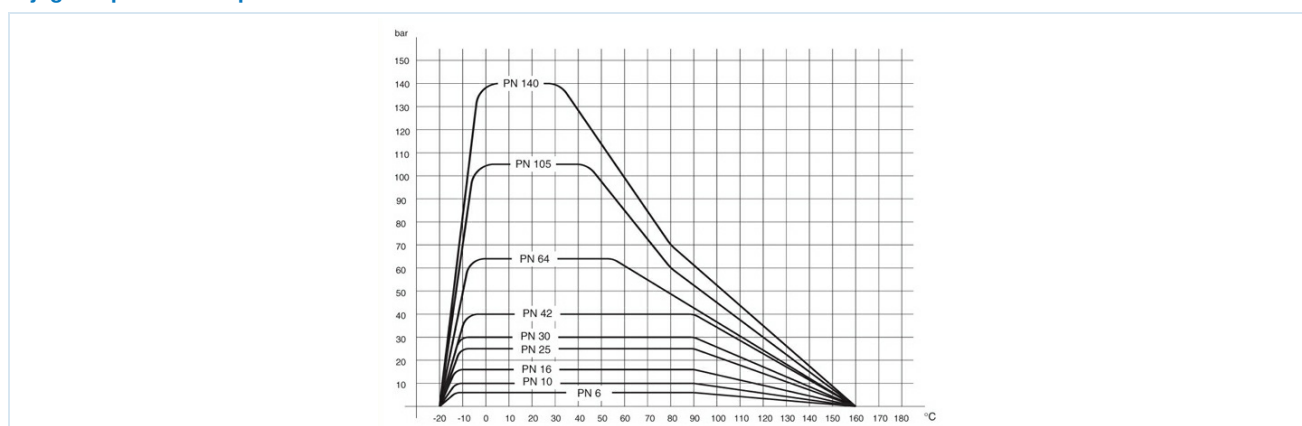

Ilustracije nisu obavezujuće

Zadržavamo pravo na konstruktivne, dimenzione i promene materijala.

Armature / kuglasti ventili / Drugi materijali - A02 / kuglasti ventili sa priрубnicom serije BA310, BA311

Verzija 3

260669 / Generisano 2026/37 SR

PROIZVEDENO U EVROPI

+381 11 2399521

balkan@stasto.eu

© STASTO Automatizacija d.o.o.

www.stasto.rs

Otvori seriju online

Strana 2 / 2

