

way valves - manually operated series PM153




GENERAL FEATURES

Construction	spool valve
Body material	Metal
Single use	YES
Manifold use	NO
Available functions	5/2 5/3

GENERAL TECHNICAL DATA


Fluid	filtered air with or without lubrication
Connections	1/2"
Temperature Range	-5 / +50°C (23/122°F) Please note: Below 3°C the air of the circuit must be free from humidity
Reference Flow Rate	P1= 6 bar; $\Delta P= 1$ bar 5/2= 2.500 l/min 5/3= 2.500 l/min

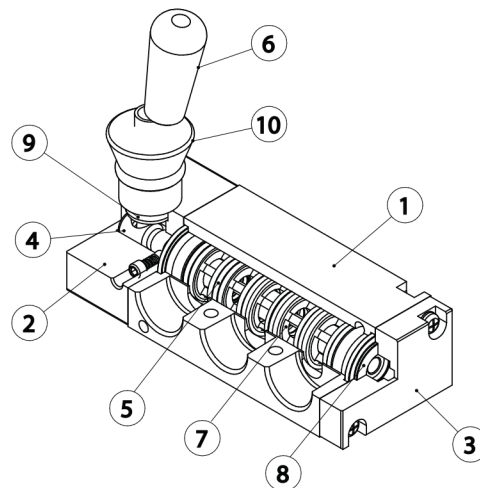

USED MATERIALS

1. **Body valve** - Aluminium
2. **Operator body** - Aluminium
3. **Base command** - Aluminium
4. **Spool** - Stainless steel
5. **Gasket** - Rubber
6. **Leva** - Metal, Technopolymer
7. **Spacers** - Technopolymer
8. **Centering ring** - Aluminium
9. **Cover** - Gomma

LEVER VALVE 90° 5/2 - 5/3 RETURN TO CENTRE

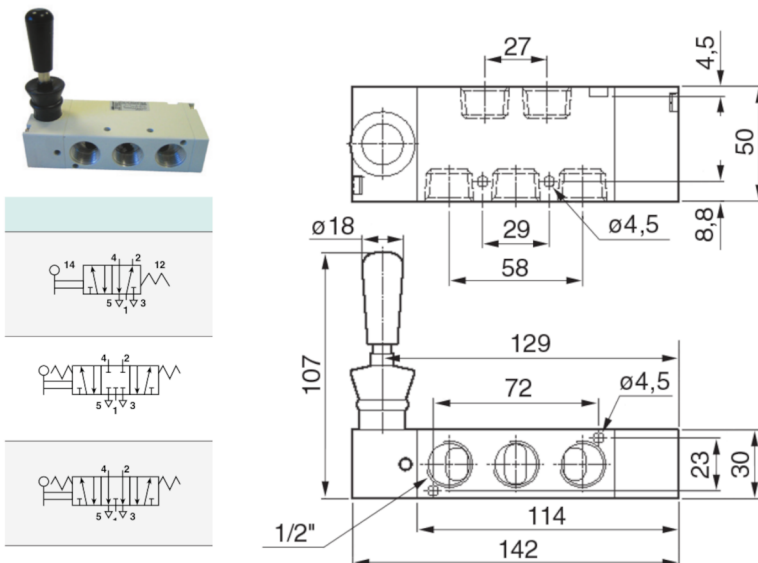


TECHNICAL DATA

Connection size G1/2"

Working pressure 0÷10 Bar (0÷1,00 MPa)

LEVER VALVE 90° 5/2 - 5/3 FIXED POSITIONS

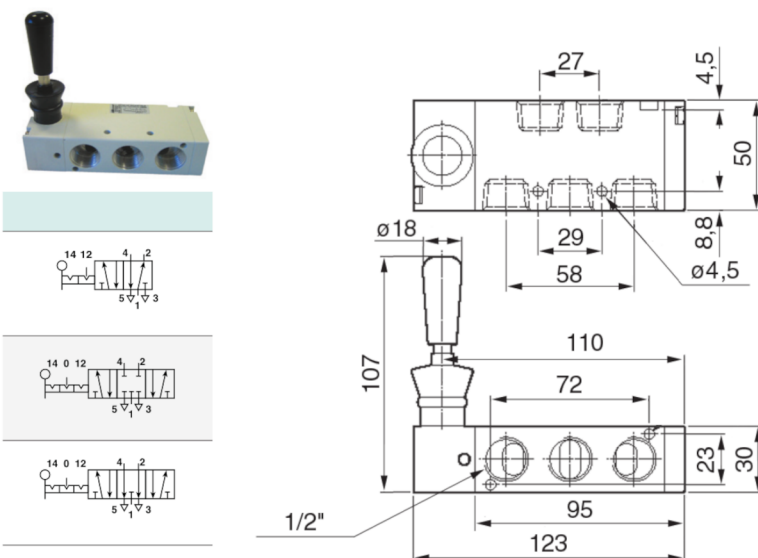

TECHNICAL DATA

Connection size G1/2"

Working pressure 0÷10 Bar (0÷1,00 MPa)