


Letkuliittimet - PA6 tai vastaavasti POM

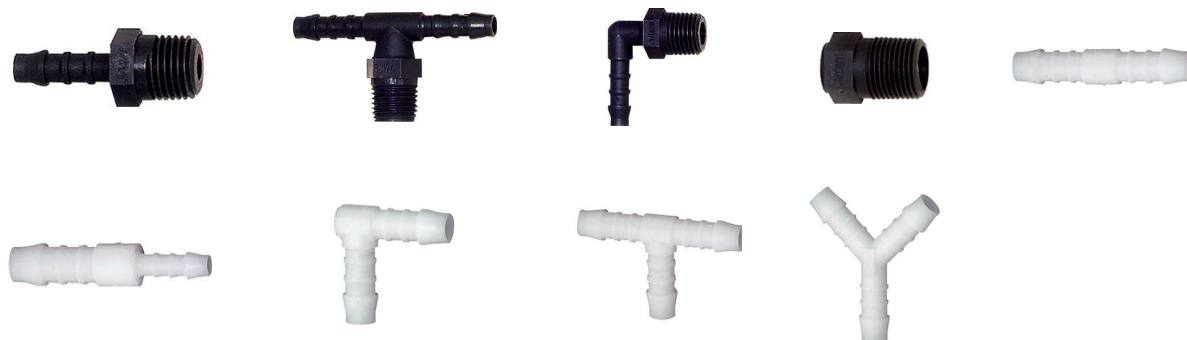

Liitäntä	R1/8"..."R2" Kartiokierrettä kierre mukaan ISO 7/1, M5 ISO:n mukaan R/262
Materiaali	Kierreläitimet PA6, Liitin POM
Aineväliaine	Paineilma, neutraalit kaasut, Kaasut ja nesteet, jotka eivät kemiallisesti vahingoita materiaaleja
Aineen lämpötila	-40...+90°C
Käyttöpaine	-1...10 bar

T-liitin

	varten letku D1 [mm]	D2	L1	L3	Tyyppi
	3	2,5	25	12,5	HN26-03-P
	4	2,7	35	19,5	HN26-04-P
	5	3	42	22	HN26-05-P
	6	4	50	26	HN26-06-P
	8	5,6	58	30	HN26-08-P
	10	7	62,5	33,5	HN26-10-P
	12	8,6	69	36	HN26-12-P
	13	8,6	68	36	HN26-13-P
	16	12	81	45	HN26-16-P
	19	15	85	45	HN26-19-P

T-letkuliitin, sisäkierretty letkunippa - Kartiokierrettä kierre

	ulkokierre D2	varten letku D1 [mm]	D3	L1	L4	SW	Tyyppi
	R1/8"	4	2,5	21	20	10	HN26C-04-18-D
	R1/8"	6	4	28,5	21	10	HN26C-06-18-D
	R1/4"	4	2,5	21	26	14	HN26C-04-14-D
	R1/4"	6	4	28,5	26	14	HN26C-06-14-D
	R1/4"	8	5,6	33	27,5	14	HN26C-08-14-D



Y-haaraliitin

	varten letku D1 [mm]	D2	L1	Tyyppi
	3	2,5	21	HN31-03-P
	4	2,5	25,5	HN31-04-P
	5	3	43	HN31-05-P
	6	4	44	HN31-06-P
	8	5,6	51	HN31-08-P
	10	7	54	HN31-10-P
	12	8,6	64	HN31-12-P
	13	9	65	HN31-13-P
	16	12	67	HN31-16-P
	19	15	72	HN31-19-P

Suora liitin

	varten letku D1 [mm]	L1	Tyyppi
	3	25	HN38-03-P
	4	35	HN38-04-P
	5	45	HN38-05-P
	6	49	HN38-06-P
	8	56	HN38-08-P
	10	63	HN38-10-P
	12	66,5	HN38-12-P
	13	73	HN38-13-P
	16	75	HN38-16-P
	19	76	HN38-19-P

Suora supistusliitin

	varten letku D1 [mm]	D2	varten letku D3 [mm]	L1	Tyyppi
	4	2,5	3	30	HN38-03-04-P
	6	2,7	4	42,5	HN38-04-06-P
	8	2,7	4	48	HN38-04-08-P
	8	4	6	54	HN38-06-08-P
	10	4	6	58	HN38-06-10-P
	10	5,6	8	60,5	HN38-08-10-P
	12	5,6	8	62,5	HN38-08-12-P
	12	7	10	64	HN38-12-10-P



Kierrettävä letkunippa - Kartiokierrettiä kierre

A technical drawing of a turnable hose nipple. The drawing shows a perspective view of the component. It has a hexagonal base with a threaded section. Dimensions are indicated with arrows: D1 is the outer diameter of the hexagonal base, D2 is the outer diameter of the threaded section, D3 is the inner diameter of the threaded section, L1 is the length of the threaded section, and SW is the width of the hexagonal base.

ulkokierre D2	varten letku D1 [mm]	D3	L1	SW	Tyyppi
M5	3	2,5	19,5	6	HN38C-03-M5-D
R1/8"	4	2,5	27	10	HN38C-04-18-D
R1/8"	6	32,5	32,5	10	HN38C-06-18-D
R1/8"	8	5,6	38	14	HN38C-08-18-D
R1/4"	4	2,5	32	14	HN38C-04-14-D
R1/4"	5	3	36	14	HN38C-05-14-D
R1/4"	6	4	37,5	14	HN38C-06-14-D
R1/4"	8	5,6	41	14	HN38C-08-14-D
R1/4"	10	7	43,5	14	HN38C-10-14-D
R3/8"	6	4	39	17	HN38C-06-38-D
R3/8"	8	5,6	41	17	HN38C-08-38-D
R3/8"	10	7	43,5	17	HN38C-10-38-D
R3/8"	12	8,6	45,5	17	HN38C-12-38-D
R1/2"	8	5,6	49	22	HN38C-08-12-D
R1/2"	12	8,6	54	22	HN38C-12-12-D
R1/2"	16	12	58	22	HN38C-16-12-D

Kulmaliitin

A 3D perspective technical drawing of a 90-degree elbow fitting. The fitting is shown in a light gray color. Dimension lines with arrows indicate the following measurements: D1 is the outer diameter of the horizontal section; D2 is the outer diameter of the vertical section; L1 is the length of the horizontal section; L2 is the length of the vertical section; and L3 is the overall height from the base of the vertical section to the top of the horizontal section.

varten letku D1 [mm]	D2	L1	L3	Tyyppi
3	2,5	12,5	12,5	HN61-03-P
4	2,5	17,5	19,5	HN61-04-P
5	3	21	22	HN61-05-P
6	4	25	26	HN61-06-P
8	5,6	29	30	HN61-08-P
10	7	31	33,5	HN61-10-P
12	8,6	34,5	36	HN61-12-P
13	8,6	36,5	38,5	HN61-13-P
16	12	40,5	45	HN61-16-P
19	15	43,5	46	HN61-19-P


Kulmaruuvattava letkuliitin 90° - Kartiokierrettiä kierre

A technical drawing of a 90-degree turnable elbow fitting. The drawing shows the fitting from a side perspective, highlighting its L-shaped structure. Key dimensions are labeled: 'SW' for the outer diameter of the top horizontal section, 'D1' for the outer diameter of the bottom vertical section, 'D2' for the outer diameter of the top horizontal section at the elbow joint, 'D3' for the outer diameter of the bottom vertical section at the elbow joint, 'L1' for the length of the top horizontal section, and 'L4' for the length of the bottom vertical section. The fitting has a threaded end on the top horizontal section and a smooth end on the bottom vertical section.

ulkokierre D2	varten letku D1 [mm]	D3	L1	L4	SW	Tyyppi
R1/8"	4	2,7	21	16	10	HN61C-04-18-D
R1/8"	6	4	28,5	21	10	HN61C-06-18-D
R1/4"	4	2,7	21	25	14	HN61C-04-14-D
R1/4"	6	4	28,5	26	14	HN61C-06-14-D
R1/4"	8	5,6	33	27,5	14	HN61C-08-14-D
R1/4"	10	7	38	30	14	HN61C-10-14-D
R3/8"	6	4	28,5	27	17	HN61C-06-38-D
R3/8"	8	5,6	36	31	17	HN61C-08-38-D
R3/8"	10	7	38	30	17	HN61C-10-38-D
R3/8"	12	8,6	40,5	31	17	HN61C-12-38-D
R1/2"	8	5,6	36	36	22	HN61C-08-12-D
R1/2"	12	8,6	40,5	36	22	HN61C-12-12-D



Sulkuruuvi - Kartiokierrettä kierre

	ulkokierre D2	L1	SW	Tyyppi
	R1/8"	12,5	10	TH67C-18-D
	R1/4"	17,5	14	TH67C-14-D
	R3/8"	27	17	TH67C-38-D
	R1/2"	27,5	22	TH67C-12-D

Kuvat ei-sitova

Oikeus rakenne-, mitta- ja materiaalimuutoksiin pidätetään

Pneumatiikka / Liitoselementit ja kytkimet / Liittimet / Letkuliittimet / Liittimet/Letkuliittimet - PA/POM - Paine 10bar

