
Partnership. With Guarantee.

# Compressed air nozzles - Blow gun



## Standard nozzle, Aluminium







| Connection | Blowing force at 100 mm distance at 6 bar [N] | Air consumption at 6 bar [Nl/min] | Noise at 1 m distance at 6 bar [dB(A)] | Type |
|---|---|---|---|---|
| M12x1,25 | 1,4 | 120 | 82 | S-26-SN |

## Cushioning nozzle, Aluminium, Sintered bronze







| Connection | Blowing force at 100 mm distance at 6 bar [N] | Air consumption at 6 bar [Nl/min] | Noise at 1 m distance at 6 bar [dB(A)] | Type |
|---|---|---|---|---|
| M12x1,25 | 1,1 | 318 | 65 | MN-M12x1,25 |

## Nozzle with protective shield, Aluminium, Polyethylene







| Connection | Blowing force at 100 mm distance at 6 bar [N] | Air consumption at 6 bar [Nl/min] | Noise at 1 m distance at 6 bar [dB(A)] | Type |
|---|---|---|---|---|
| M12x1,25 | 1,4 | 120 | 82 | S-26-SNPS |



+43 512 52076
austria@stasto.eu
© STASTO Automation KG

## Full jet nozzle, Aluminium




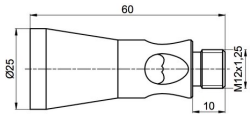


| Connection | Blowing force at 100 mm distance at 6 bar [N] | Air consumption at 6 bar [Nl/min] | Noise at 1 m distance at 6 bar [dB(A)] | Type |
|---|---|---|---|---|
| M12x1,25 | 3,1 | 336 | 93 | S-26-VN |

## Safety and noise silencer nozzle, Zinc die casting







| Connection | Blowing force at 100 mm distance at 6 bar [N] | Air consumption at 6 bar [Nl/min] > | Noise at 1 m distance at 6 bar [dB(A)] | Type |
|---|---|---|---|---|
| M12x1,25 | 3 | 300 | 77 | S-26-SMN |

## Air jacket nozzle, Aluminium







| Connection | Blowing force at 100 mm distance at 6 bar [N] | Air consumption at 6 bar [Nl/min] | Noise at 1 m distance at 6 bar [dB(A)] | Type |
|---|---|---|---|---|
| M12x1,25 | 2 | 426 | 82 | S-26-AJN |

## Low-noise fine blasting nozzle, Nickel-plated steel, Brass







| Connection | Blowing force at 100 mm distance at 6 bar [N] | Air consumption at 6 bar [Nl/min] | Noise at 1 m distance at 6 bar [dB(A)] | Type |
|---|---|---|---|---|
| M12x1,25 | 3,8 | 350 | 78,5 | S-26-FJN |

## Low-noise round nozzle, Aluminium







| Connection | Blowing force at 100 mm distance at 6 bar [N] | Air consumption at 6 bar [Nl/min] | Noise at 1 m distance at 6 bar [dB(A)] | Type |
|---|---|---|---|---|
| M12x1,25 | 4 | 650 | 83 | S-26-RN-1 |


+43 512 52076
austria@stasto.eu
© STASTO Automation KG

## Low-noise round nozzle, Aluminium







| Connection | Blowing force at 100 mm distance at 6 bar [N] | Air consumption at 6 bar [Nl/min] | Noise at 1 m distance at 6 bar [dB(A)] | Type |
|---|---|---|---|---|
| M12x1,25 | 10,5 | 1200 | 88 | S-26-RN-2 |

## Low-noise round nozzle, Aluminium







| Connection | Blowing force at 100 mm distance at 6 bar (N) [N] | Air consumption at 6 bar [Nl/min] | Noise at 1 m distance at 6 bar [dB(A)] | Type |
|---|---|---|---|---|
| M12x1,25 | 4,3 | 370 | 83 | S-26-RN-3 |

## Low-noise round nozzle, Aluminium







| Connection | Blowing force at 100 mm distance at 6 bar [N] | Air consumption at 6 bar [Nl/min] | Noise at 1 m distance at 6 bar [dB(A)] | Type |
|---|---|---|---|---|
| M12x1,25 | 7,9 | 1030 | 85 | S-26-RN-4 |

## Low-noise flat nozzle, Nickel-plated brass




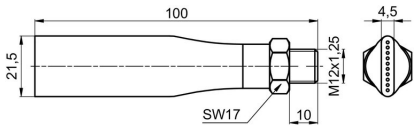


| Connection | Blowing force at 100 mm distance at 6 bar [N] | Air consumption at 6 bar [Nl/min] | Noise at 1 m distance at 6 bar [dB(A)] | Type |
|---|---|---|---|---|
| M12x1,25 | 8,2 | 930 | 86 | S-26-FN-21,5 |

## Low-noise flat nozzle, Nickel-plated brass



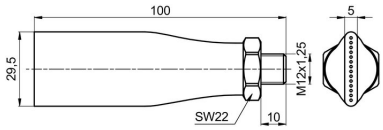



| Connection | Blowing force at 100 mm distance at 6 bar [N] | Air consumption at 6 bar [Nl/min] | Noise at 1 m distance at 6 bar [dB(A)] | Type |
|---|---|---|---|---|
| M12x1,25 | 11,5 | 1080 | 90 | S-26-FN-29 |



© STASTO Automation KG

## Low-noise flat nozzle, Nickel-plated brass



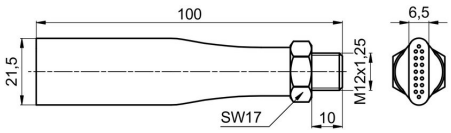


| Connection | Blowing force at 100 mm distance at 6 bar [N] | Air consumption at 6 bar [Nl/min] | Noise at 1 m distance at 6 bar [dB(A)] | Type |
|---|---|---|---|---|
| M12x1,25 | 13,2 | 1300 | 92 | S-26-FN-21 |

## Straight extension nozzle, 160mm



| Connection | Blowing force at 100 mm distance at 6 bar [N] | Air consumption at 6 bar [Nl/min] | Noise at 1 m distance at 6 bar [dB(A)] | Type |
|---|---|---|---|---|
| M12x1,25 | 3 | 250 | 93 | XNS160 |

Illustrations non-binding Design, dimensional and material changes reserved




+43 512 52076
austria@stasto.eu
© STASTO Automation KG